

M2x2 Magneto-Optical Switch

Features

- Solid-state high speed
- High Stability, High Reliability
- Epoxy-free on Optical Path
- Fail-safe latching

Applications

- Optical switching
- Fault Protection
- Time Delay measurement
- System monitoring
- Sensing system



Product Description


The M2x2 optical switch is connected to the optical path by connecting or blocking the optical signal. The switch has non-mechanical configurations and activated via an electrical control signal. The switch also has build-in circulator and isolator functions.

Products are widely used in aerospace and military equipment.

Performance Specifications

Parameters	Unit	Specifications
Wavelength Range	nm	1520 ~ 1580
Test Wavelength	nm	1550
Insertion Loss ^{1, 2}	dB	≤ 1.2
TDL	dB	≤ 0.30
PDL	dB	≤ 0.20
Return Loss	dB	≥ 50
Crosstalk	dB	Bidirectional ≥ 20
		Unidirectional ≥ 35
Repeatability	dB	$\leq \pm 0.01$
Switching Time	us	≤ 100
Pulse Duration	us	≥ 200
Durability	Cycles	≥ 100 Billions
Switch Type	NA	Latching
Operating Current	mA	≤ 200
Maximum Optical Power	mW	≤ 500
Operating Temperature	°C	-5 ~ +70
Storage Temperature	°C	-40 ~ +85
Dimension	mm	(L)34.0×(W)7.5×(H)7.5 ± 0.2
Note: 1 Test at room temperature and SOP. 2 Excluding connectors, 0.2dB for one pair connectors.		


Mechanical Dimensions (Unit:mm)

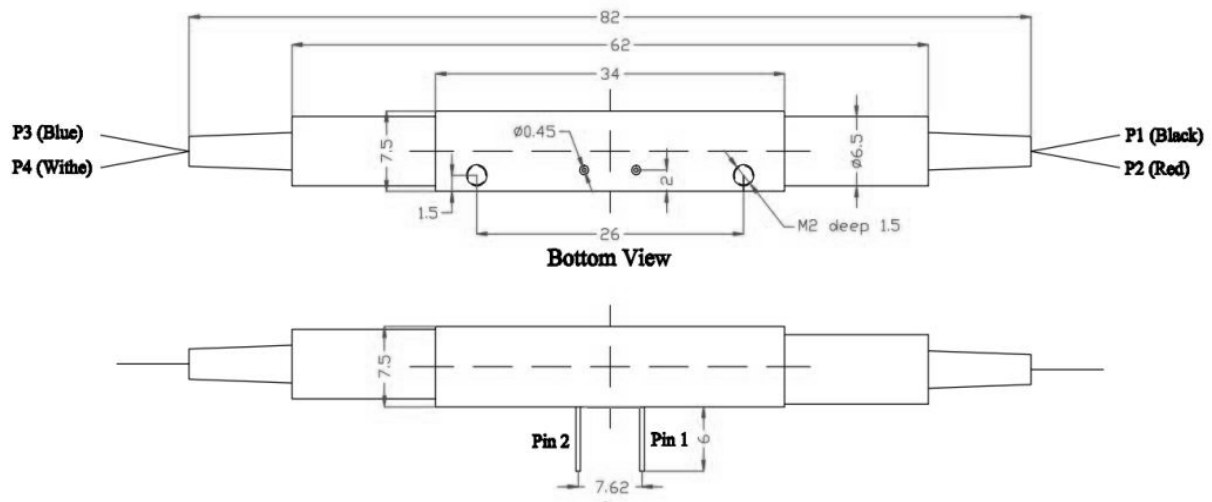

Electrical Drive

Type	Status	Optical Route	Electric Drive	
			Pin 1	Pin 2
M2x2	I	P1 ↔ P3 P2 ↔ P4	GND	V+
	II	P1 ↔ P4 P2 ↔ P3	V+	GND
Unidirectional	I	P1 → P3 P3 → P2 P2 → P4 P4 → P1	GND	V+
	II	P1 → P4 P4 → P2 P2 → P3 P3 → P1	V+	GND

Functional Diagram

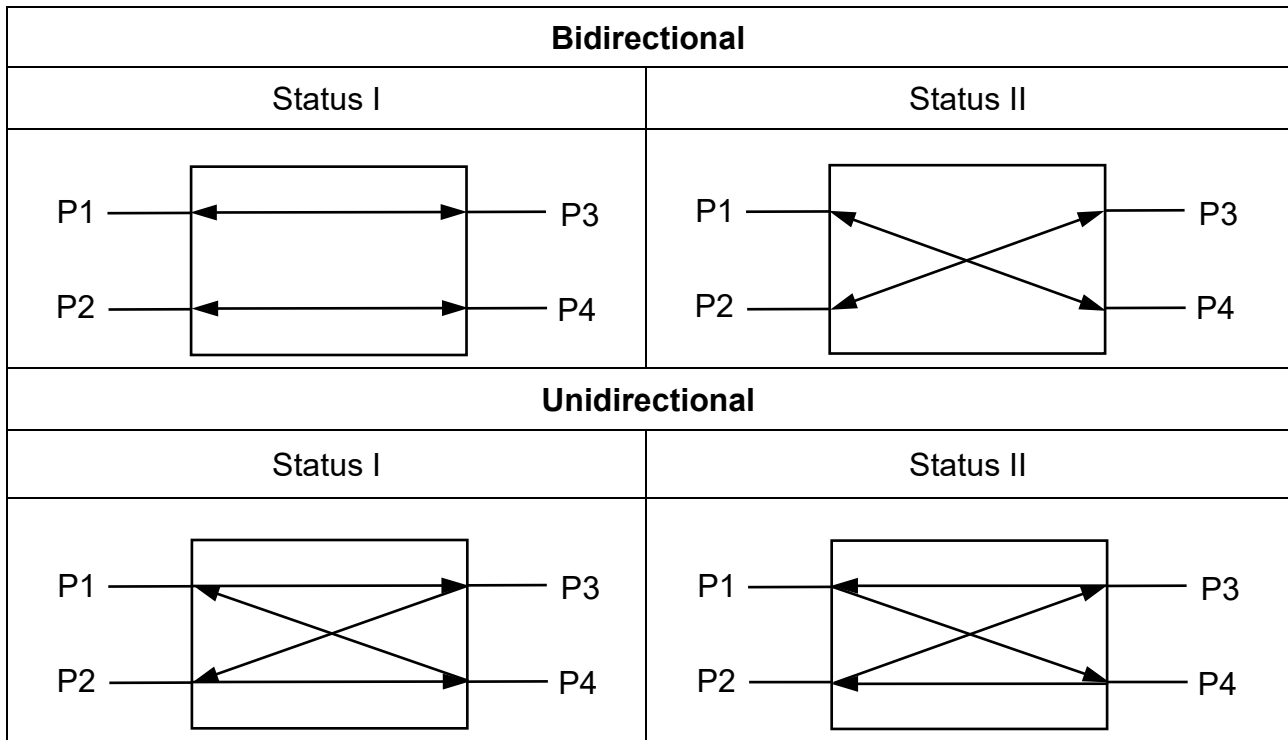

Ordering Information

YFS-M2x2- **-** **-** **-** **-** **-** **-**

 	 	 	 	 	 	
Switch Type	Fiber Type	Voltage	Wavelength	Tube Type	Fiber Length	Connector
B:	SM:	2.5:	1550:	250:	05:	OO: None
Bidirectional	SM, 9/125	2.5V	1550nm	250um	0.5m±5cm	FC: FC/PC
U:	X:	X:	X:	900:	10:	FA: FC/APC
Unidirectional	Others	Others	Others	900um	1.0m±5cm	SC: SC/PC
				X:	X:	SA: SC/APC
				Others	Others	LC: LC/PC
						X: Others